



Shenzhen Optico Communication Co.,Ltd.

Tel:0086-755-3353-2578

Fiber Attenuator



Features:

- High Attenuation Accuracy
- Low Additional Loss
- Good Stability

Products Application:


- Fiber optic communication network
- Fiber data network
- Fiber CATV network
- Fiber test system
- Measurement of high power optical devices





Shenzhen Optico Communication Co.,Ltd.
Tel:0086-755-3353-2578

Fiber Attenuator

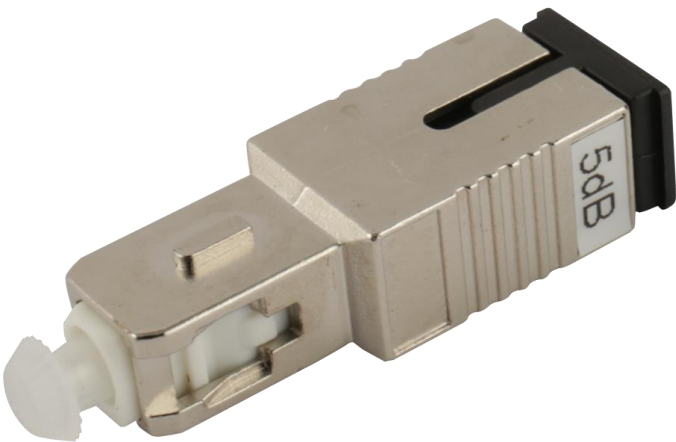

Fiber Connector	SC,LC,FC,ST	Ferrule Type	Zirconia Ceramic
Connector Gender	Fixed Male to Female	Transfer Mode	SM/MM
Attenuation	1~100dB,15dB,20dB,25dB	Operating Wavelength	1260~1620(SM),850~1330(MM)
Attenuation Accuracy	+/-0.5dB(<10dB),+/-10%(10dB~25dB)	Return loss	>=55dB
Polarization Dependent Loss	<=0.2dB	Max Optic Input Power	200mW
Humidity	95%RH	Operating Temp Range	-40°C~80°C
Storage Temp Range	-40°C~85°C		





Shenzhen Optico Communication Co.,Ltd.
Tel:0086-755-3353-2578

Fiber Attenuator



Connector Type	End Surface Type	Attenuation	Fiber Type	Connector Gender	Light Length
1=SC	1=UPC	1=1dB	1=SM	1=Fixed	1=1310nm
2=LC	2=APC	2=2dB	2=MM	2=Female;Male	2=1550nm
3=FC		3=3dB		3=In-line	3=850nm
4=ST		4=4dB		4=Variable	4=1300nm
S=Custom		...			
		20=20dB			
		25=25dB			
		S=Custom			

